Sfero Döküm / Ductile Iron

T-0910



Genel Özellikler / General Specifications
Çalışma Sıcaklık Aralığı / Working Temperature : -10 ... +110 °C (16 Bar)
"110 °C Kullanım Sıcaklığının Pik Noktasıdır."
"Peak Usage Temperature is 110°C"

Standartlar / Standards
Sertifikalar / Certificates :
Tasarım / Design : TS EN 593
Bağlantı Boyutları / Connection Dimensions : TS EN 1092-2
Testler / Tests : TS EN 12266-1

Uygulamalar / Applications
HVAC Sistemleri.Arıtma Tesisleri,
Kağıt Endüstrisi, Tatlı Su Tesisatları
HVAC Systems, Water treatment systems,
Paper industry, Fresh water system


Ürün sayfası için okutun
Scan for product page

Ölçüler Dimensions

Anma Çapı Nominal Diameter	Flanş Uyumluluk Flange Compatibility					
DN	PN6	PN10	PN16	CLASS 150	JIS5K	JIS10K
DN40	✓	✓	✓	✓		✓
DN50	✓	✓	✓	✓		✓
DN65	✓	✓	✓	✓	✓	✓
DN80	✓	✓	✓	✓	✓	✓
DN100	✓	✓	✓	✓		✓
DN125	✓	✓	✓	✓	✓	✓
DN150	✓	✓	✓	✓	✓	✓
DN200	✓	✓	✓	✓	✓	✓
DN250		✓	✓			
DN300	✓	✓	✓			
DN350		✓	✓			
DN400		✓	✓			
DN450		✓	✓			

Malzeme Özellikleri Material Specifications

No	Parça Adı / Part Name	Malzeme / Material
1	Gövde / Body	GGG 40 - EN GJS 400-15 - Sfero Döküm / Ductile Iron
2	Klape + Kaplama Clapper + Plated	GGG 40 - EN GJS 400-15 Sfero Döküm + Nikel Kaplama / Ductile Iron + Nickel Plated
3	Kol / Lever	DN 40 - DN150 Alüminyum / Aluminum DN 200 - DN 250 GGG 40 - EN GJS 400-75 Sfero Döküm / Ductile Iron
4	Üst Mil / Top Stem	X20Cr13 - AISI420 - Paslanmaz Çelik / Stainless Steel
5	Alt Mil / Bottom Stem	X20Cr13 - AISI420 - Paslanmaz Çelik / Stainless Steel
6	O-Ring	EPDM
7	Vulkanize Conta / Seat	EPDM

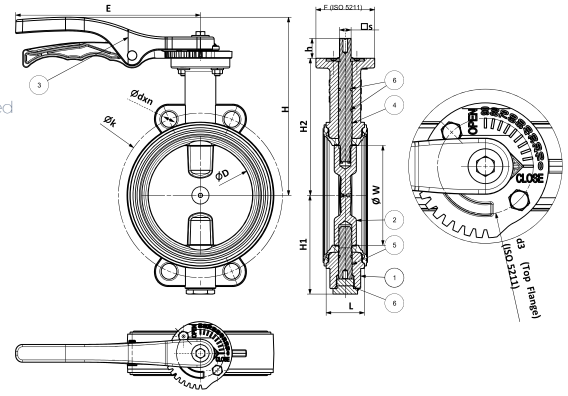

Ölçüler Dimensions

Anma Basıncı Nominal Pressure		16 Bar												
Anma Çapı Nominal Diameter	DN	40	50	65	80	100	125	150	200	250	300	350	400	450
Vana Boyutları Valve Dimensions	L	33	43	46		52	56		60	68	78		102	114
	E	200				270			380		Dişli Kutuludur / With Gear Box			
	H1	69.5	73.5	80	100	112.5	133	144	178	209	240	280	310	340
	H2	118	140	150	160	181.5	196	200	240	280	320	360	400	420
	H	188	210	220	230	240	256	260	315	320	Dişli Kutuludur / With Gear Box			
	W	26,8	31	45,9	62,2	90,6	110	145,6	193,9	241,6	292,3	341,8	388,8	445,6
	D	42.5	53	65	79	104,5	123,5	156	203	251	302,5	334	402	445
	k	110	125	145	160	180	210	240	295	355	410	470	525	585
	dxn	19x4			19x8			23x8	23x12	28x12		28x16	31x16	31x20
	Tepe Flanş / Upper Flange	F05				F07			F10				F16	
	d3	50				70			102				165	
	□s Mil Karesi / Stem Square	□9				□14	□17			□22			□27	
	h	33	33	33	33	29	29	29	40	42.5	42.5	52.5	57	57
Ağırlık Weight	Kg	2,5	3	3,5	4	6	7	9	15	23	27	49	90	110

Vanalarımız; dişli kutusu, pnömatik aktüatör ve elektriksel aktüatör bağlantısına uygundur.
Our valves; Suitable for gearbox, pneumatic actuator, and electrical actuator connections.